

SPN 1205

SIMAG

1150 kg Modular Ice Machine

Complete range: SPN 125 - SPN 255 - SPN 405 - SPN 605 - SPN 1205

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production

Matching bins

Machine	Bins		kg
SPN 1205	CBT48FMCD	R300	406
	CBT52FMCD	R400	478
	●	RC300	391

- ✓ : Direct coupling
 - : Ice chute cut-out performed upon installation
- CBTxxxxxxx: accessory needed

Voltage


400/50/3 Standard version
- Available on demand

Technology and Certifications



Type of ice

Flake ice



Residual water content 15 %

Machine dimensions

Net size WxDxH	1065 x 698 x 868 mm
Net weight	179 kg
Shipping size WxDxH	1170 x 760 x 1040 mm
Shipping weight	198 kg

MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SPN 1205

SIMAG

1150 kg Modular Ice Machine

Complete range: SPN 125 - SPN 255 - SPN 405 - SPN 605 - SPN 1205

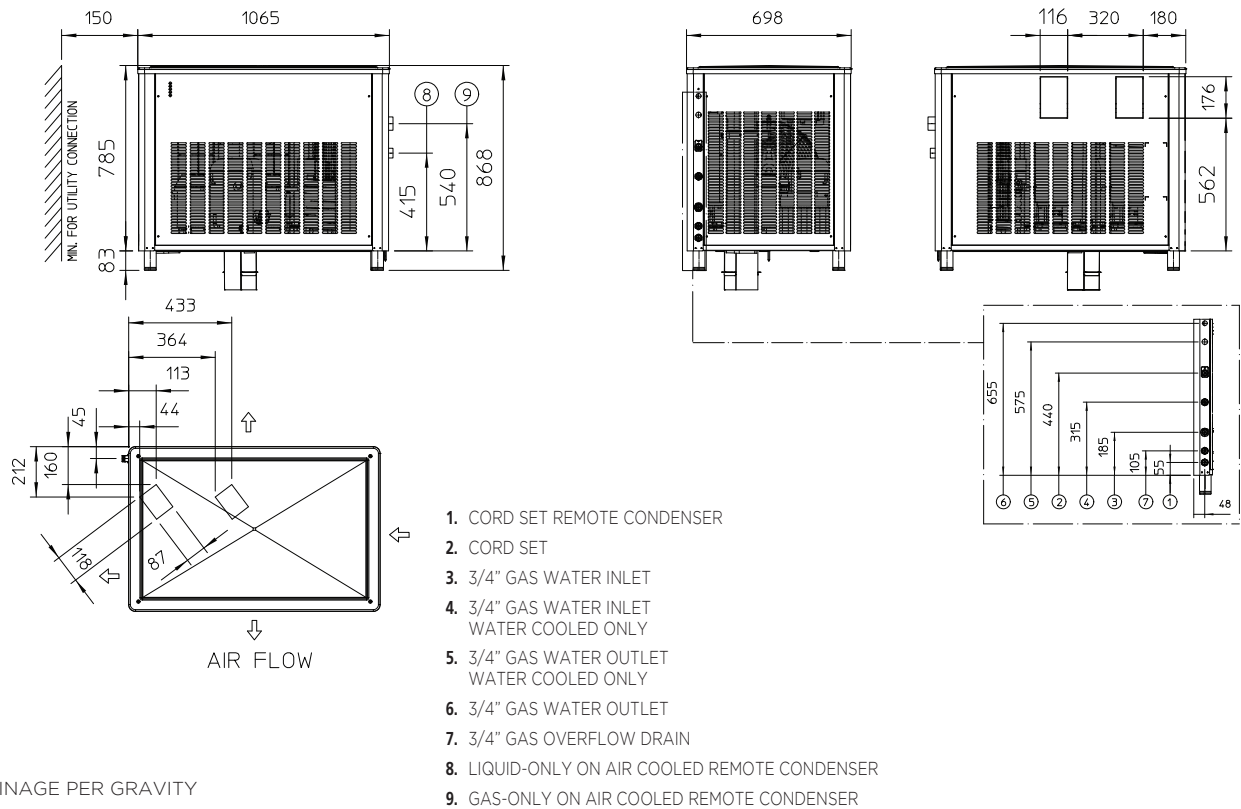

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SPN 1205 A	400/50/3	1150	3600	R452A	2.400	16	n.a.	n.a.	36.0
SPN 1205 W	400/50/3	1150	3600	R452A	1.200	16	n.a.	n.a.	400.0

(*) Power Input: at 43°C Ambient Temperature
 (***) Water Consumption: at 32°C Air and 21°C Water