



# VACUUM SEALER SU-604CC

Floorstanding unit. 40m³/h. 465+465 mm.



## SALES DESCRIPTION

Two sealing bars (465+465 mm.)  
40 m³/h Busch vacuum pump.  
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

## INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

## OPTIONAL

- Inert gas
- Printer
- Bluetooth connectivity
- Vacuum packing bags
- External vacuum kit for
- Vac-Norm, containers and accessories
- Bag cutting kit
- Support for liquid packaging
- Additional filling plates

## ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kits
- Vac-norm containers
- Smooth bags for vacuum
- packing
- Thermal labels for CG2 / RB printer
- RB Desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer

## SPECIFICATIONS

Pump capacity: 40 m³/h  
 Pump capacity (60 Hz): 48 m³/h  
 Bar length: 465 mm + 465 mm  
 Total loading: 1100 W  
 Vacuum pressure (maximum): 0.5 mbar

Plug: --  
 Electrical connection: --

### Internal dimensions

- ✓ Width: 672 mm
- ✓ Depth: 481 mm
- ✓ Height: 200 mm

### External dimensions (WxDxH)

- ✓ Width: 740 mm
- ✓ Depth: 566 mm
- ✓ Height: 997 mm

Net weight: 145 Kg

Noise level (1m.): -- dB(A)  
 Background noise: 32 dB(A)

### Crated dimensions

670 x 830 x 1200 mm  
 Gross weight: 116 Kg

## AVAILABLE MODELS

1140817	Vacuum packing machine SU-604 CC 230-400/50/3N
1140818	Vacuum packing machine SU-604 CC 230-400/50/3N -C-
1140819	Vacuum packing machine SU-604G CC 230-400/50/3N
1140820	Vacuum packing machine SU-604P CC 230-400/50/3N
1140821	Vacuum packing machine SU-604GP CC 230-400/50/3N
1140829	Vacuum packing machine SU-604 CC 208-240/60/3
1140830	Vacuum packing machine SU-604 CC 208-240/60/3 -C-
1140831	Vacuum packing machine SU-604G CC 208-240/60/3
1140832	Vacuum packing machine SU-604P CC 208-240/60/3
1140833	Vacuum packing machine SU-604GP CC 208-240/60/3

\* Ask for special versions availability

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

product sheet  
updated 04/03/2022



SAMMIC, S.L.  
Basaite, 1 - 20720 Azzovita  
www.sammic.com




# VACUUM SEALER SU-604CC

Floorstanding unit. 40m<sup>3</sup>/h. 465+465 mm.



FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

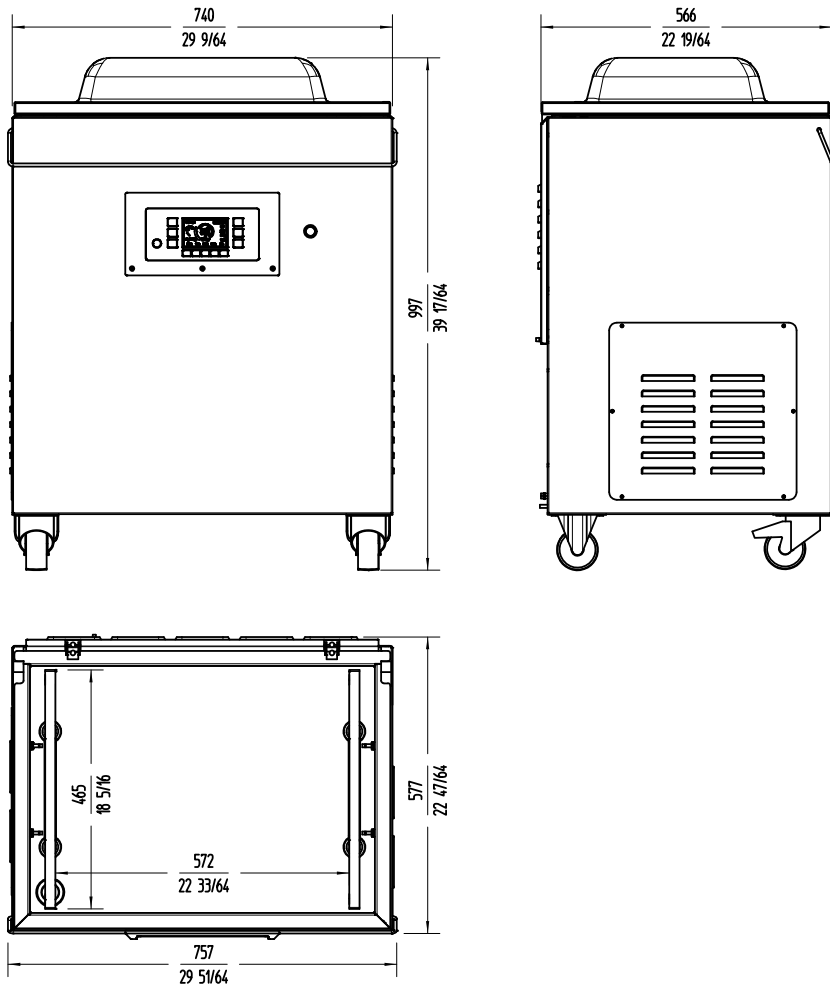

**sammic** | [www.sammic.com](http://www.sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36  
20720 Azkoitia, Spain [sales@sammic.com](mailto:sales@sammic.com)



Project	Date
Item	Qty
Approved	

product sheet  
updated 04/03/2022